

## C7VCM2 1.0

C7VCM VIA CN700 & VT8237R Plus Chipsets  
C7 CPU Onboard

### Features

- VIA C7 with 400MHz FSB

### System


CPU	C7 CPU Onboard 400MHz FSB(for nano BGA2 type CPU)
System Memory	1 X 240-pin DDR2 DIMM max.up to 1GB
Chipset	VIA CN700 & VT8237R Plus
Bios	Award 4Mbit Flash ROM Supports Plug and Play 1.0B, APM 1.2, Multi Boot, DMI Supports ACPI revision 1.0 specification
Expansion Interface	1 X PCI expansion slot
Battery	Lithium 3V/220 mAH
Size	170 X 170 mm
Operation Temperature	0-60°C
Operation Humidity	10%~90% relative humidity,non-condensing
MTBF	75000 hours

### I/O


MIO	1 X ATA-133+1 X ATA-33 IDE, 1 x PS/2 K/B, 1 X PS/2 MS, 2 X SATA-ISO, 1 X LPT , 2 X COM ( COM2 by header), 1 X VGA
Ethernet	Realtek RTL8100C Fast Ethernet controller
Audio	AC'97 Codec Audio
USB	4 X USB 2.0 port (4 ports from 2 headers)

### Display

Chipset	Integrated UniChrome Pro 3D / 2D Graphics
Memory Size	Max.up to 64MB frame buffer sharing system memory
Resolution	CRT: 1600 X 1200; LCD: 1600 X 1200
Output Interface	VGA port

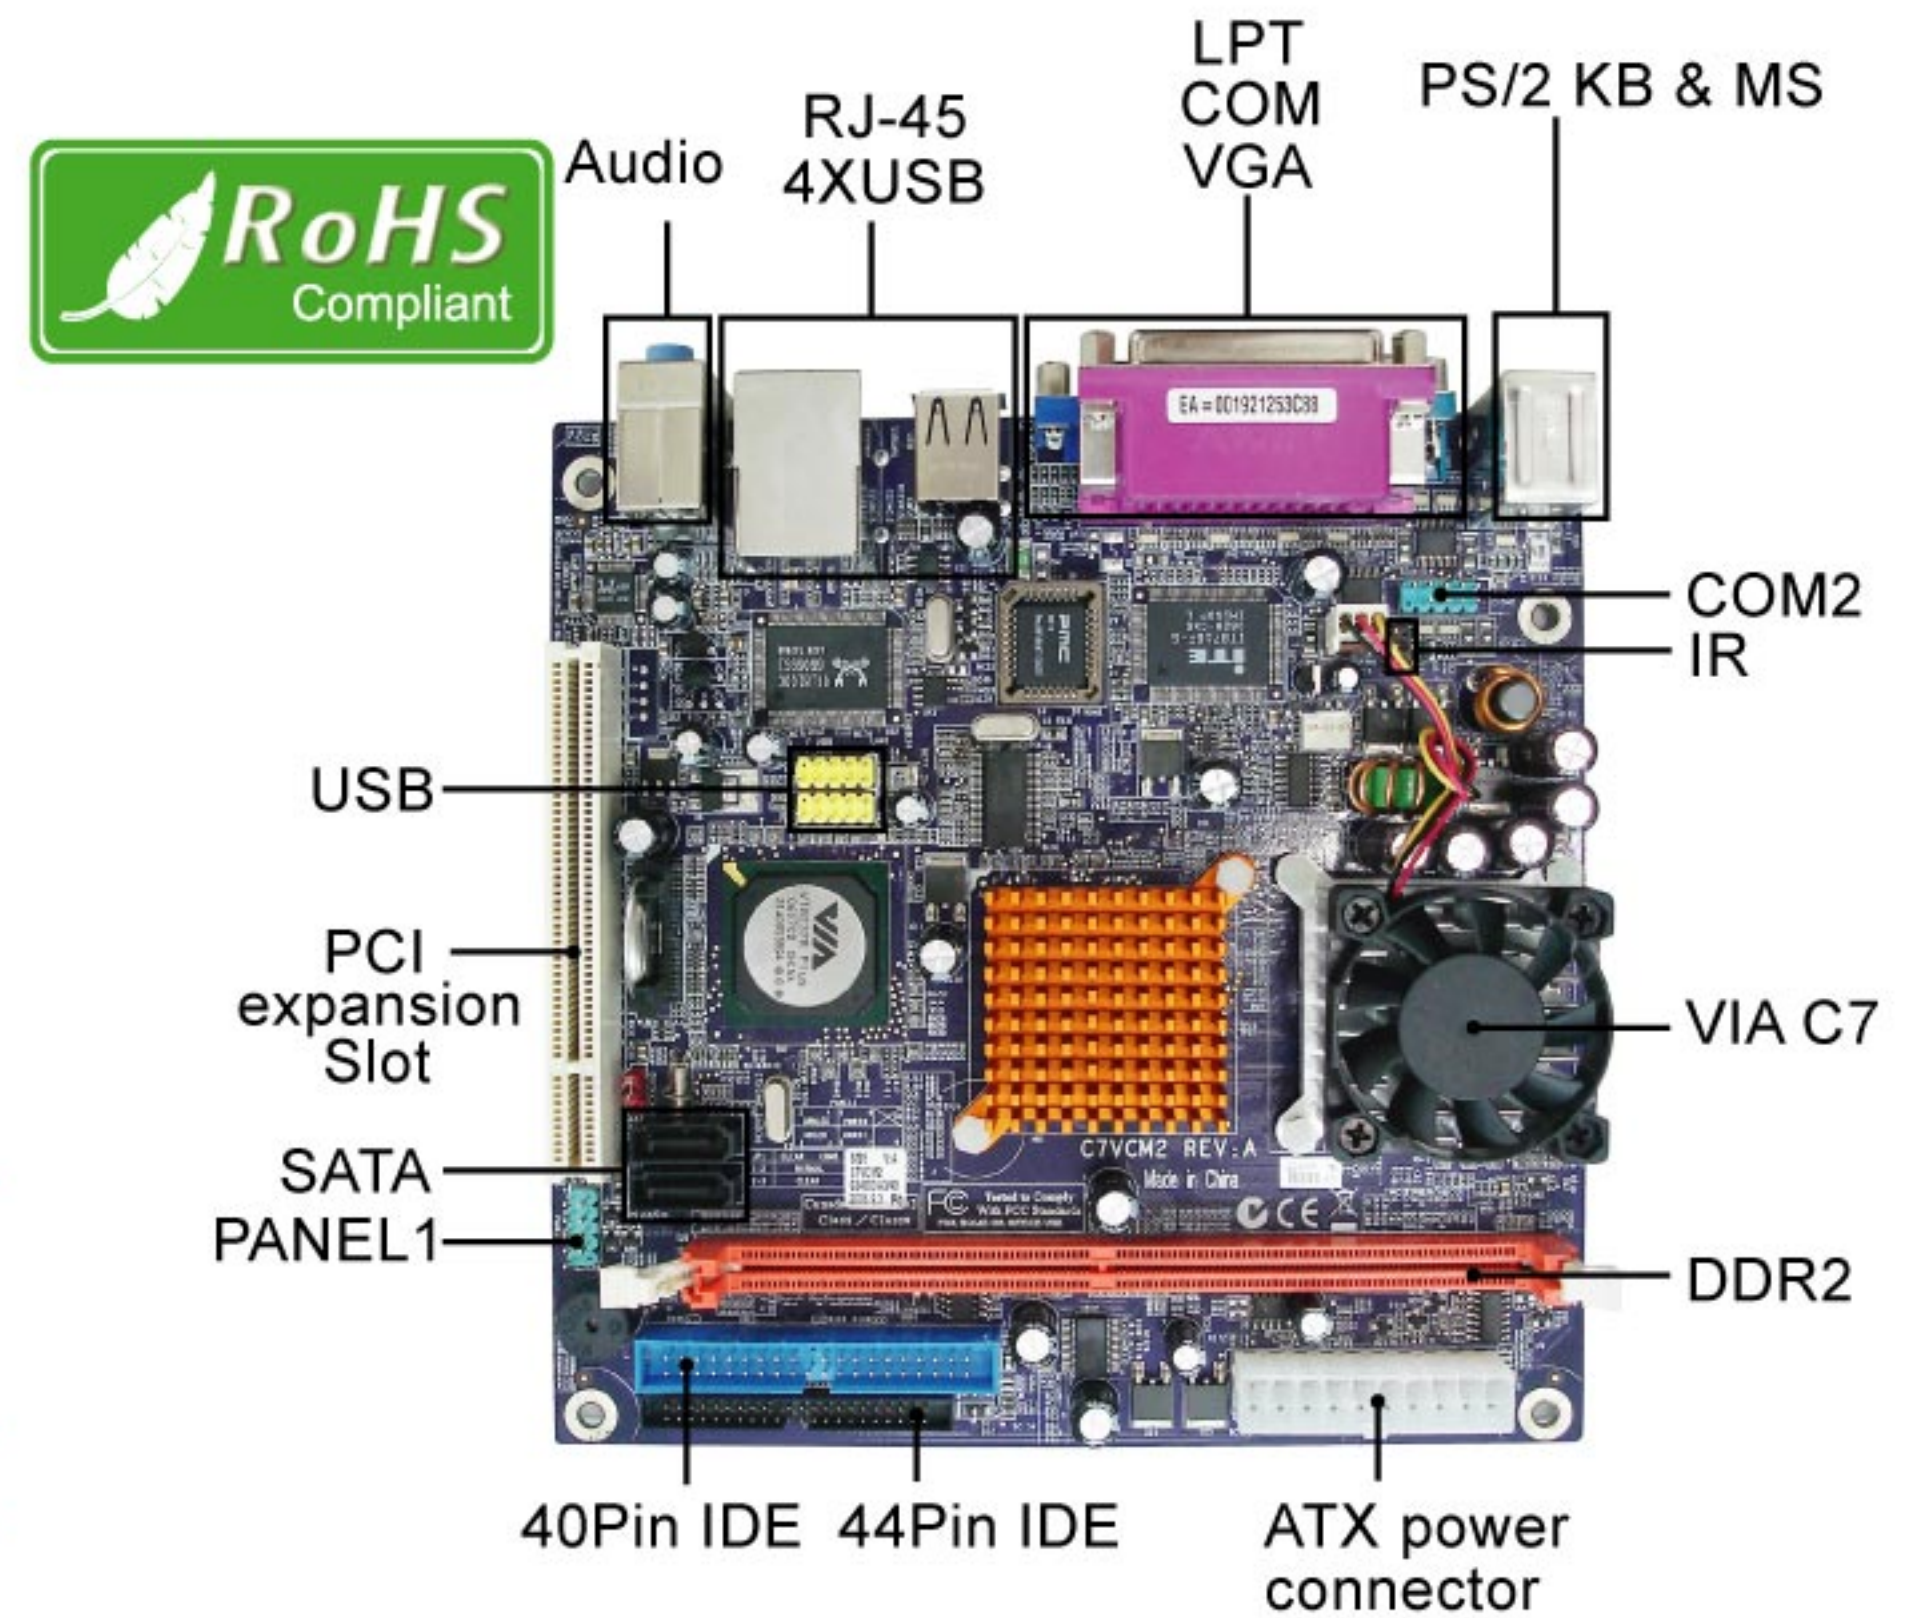

### Dimensions

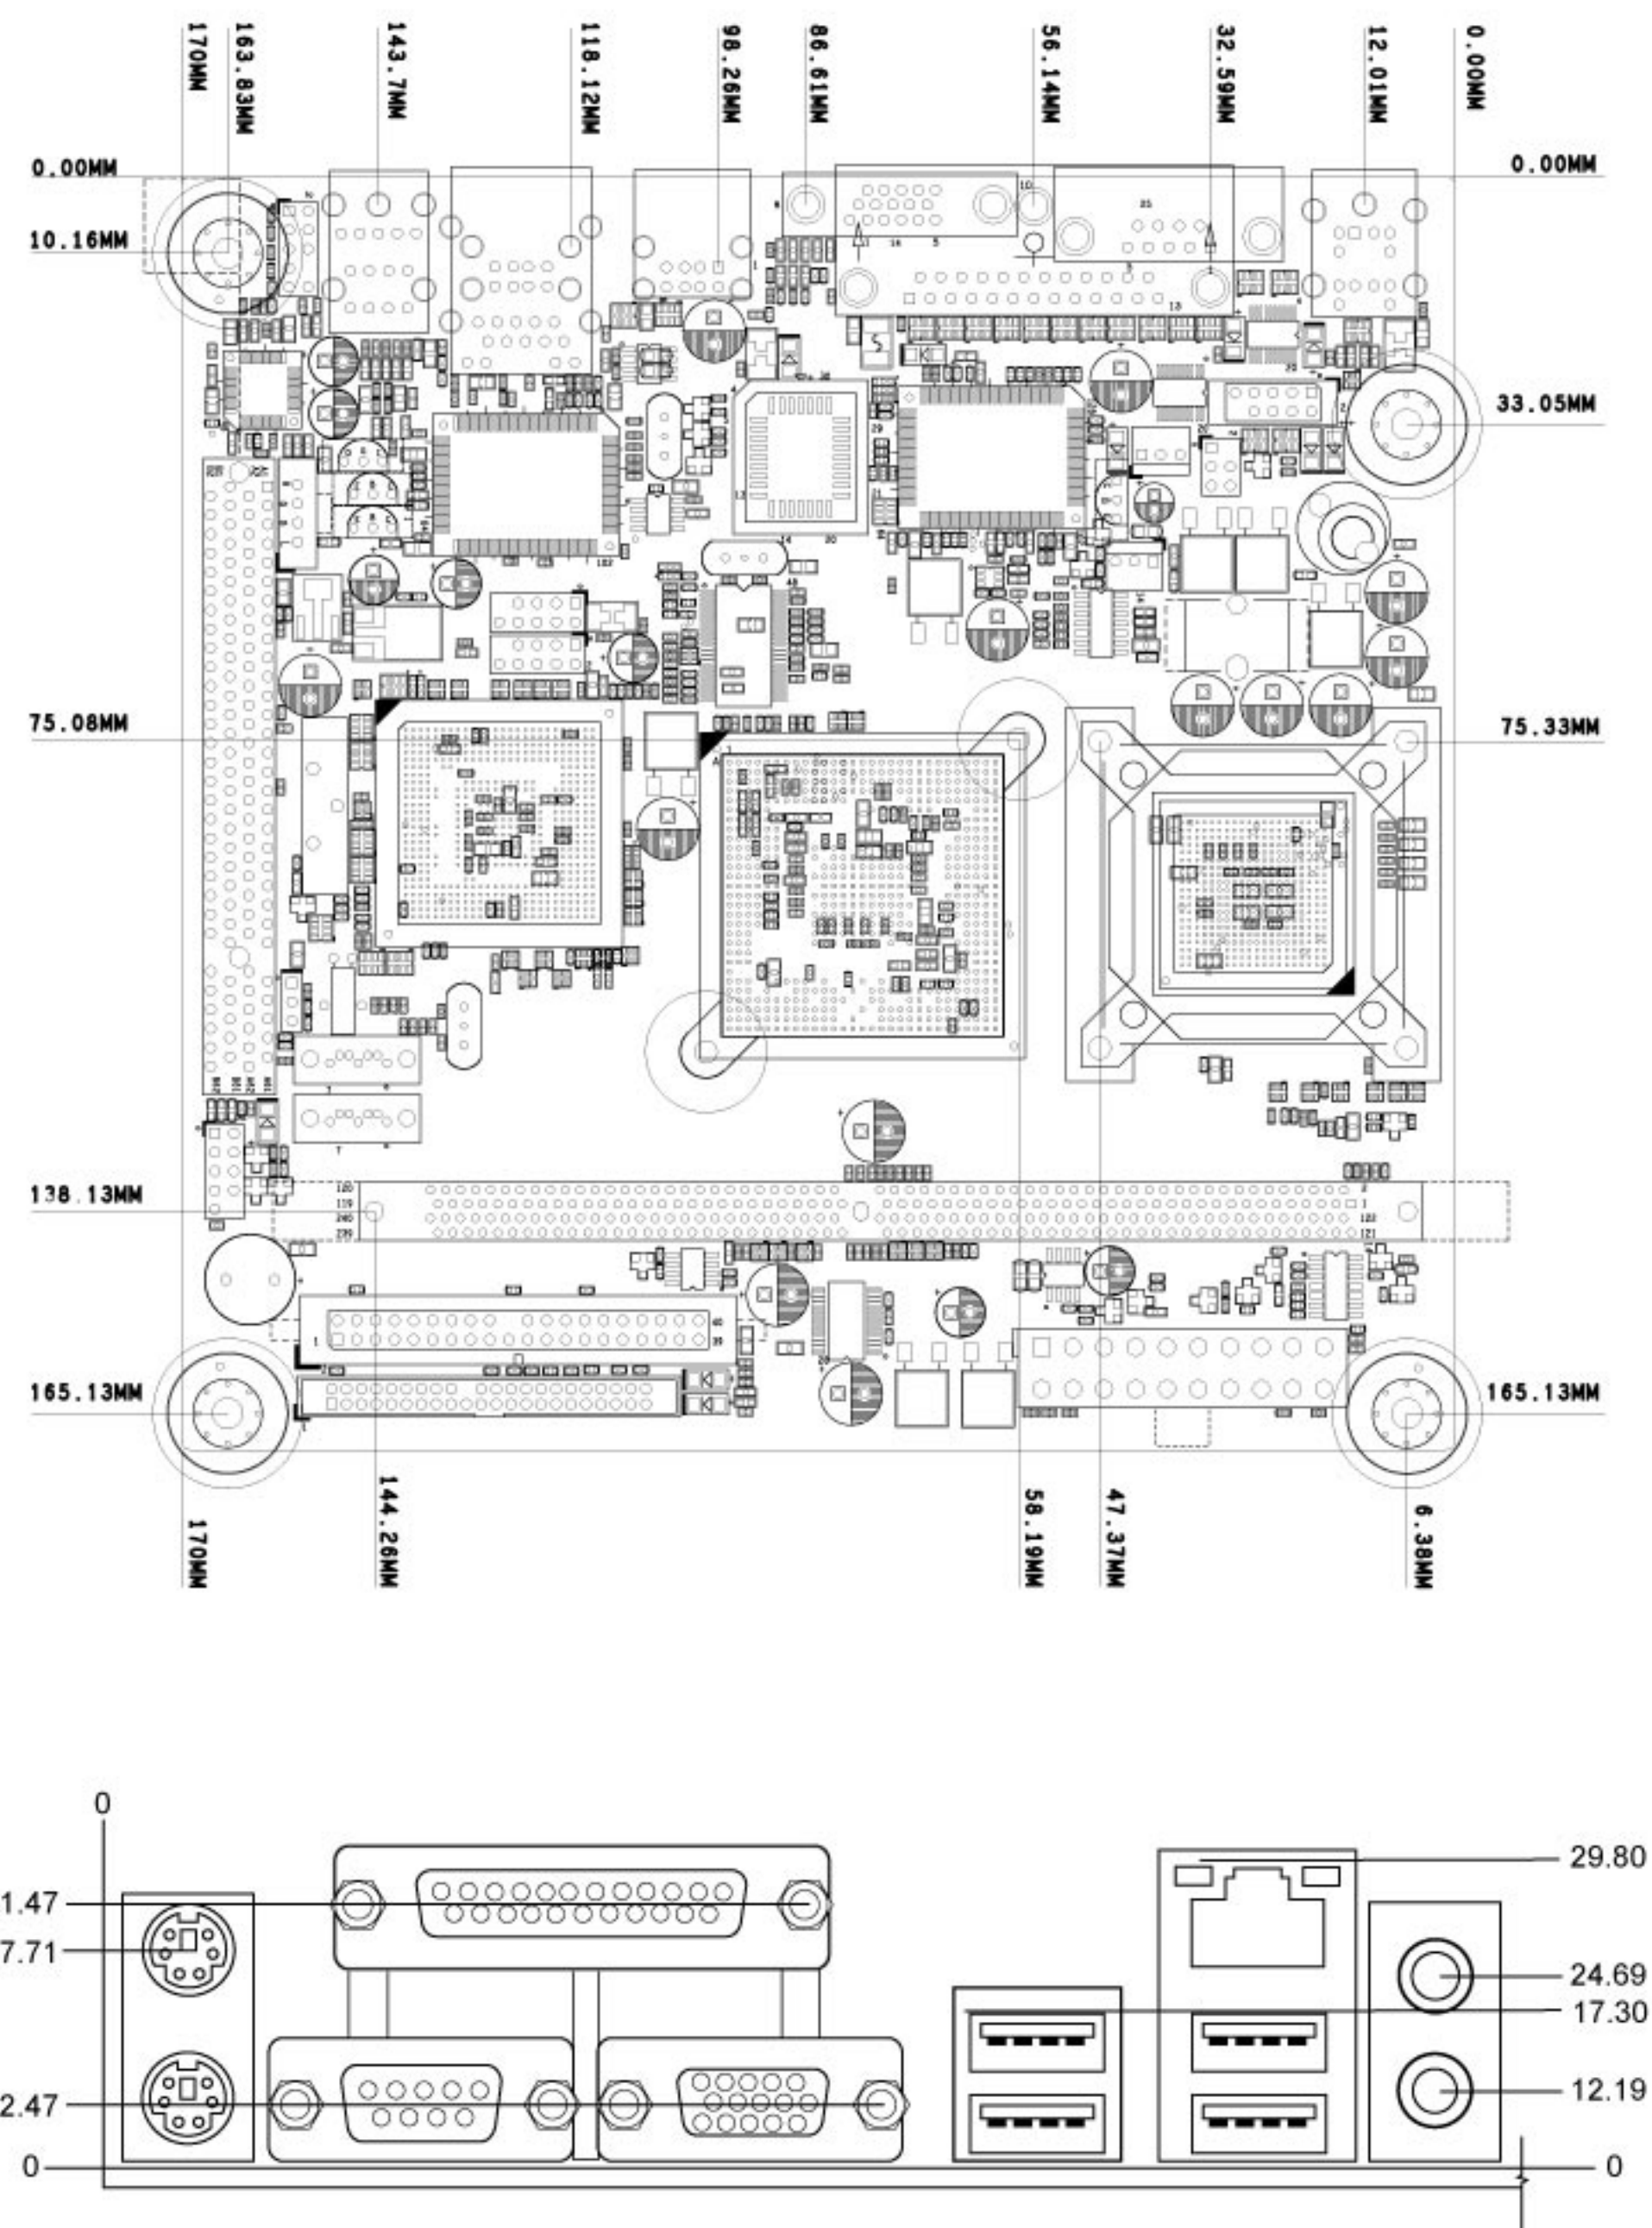

### Accessories

- |                 |                |
|-----------------|----------------|
| 1 X IDE cable   | 1 X USB cable  |
| 1 X COM cable   | 1 X I/O shield |
| 1 X User Manual | 1 X Driver CD  |